

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :
H03M 13/00

A1

(11) International Publication Number: WO 97/40582


(43) International Publication Date: 30 October 1997 (30.10.97)

(21) International Application Number: PCT/US97/06129

(22) International Filing Date: 14 April 1997 (14.04.97)

(30) Priority Data:
08/636,732 19 April 1996 (19.04.96) US(71) Applicant: GENERAL ELECTRIC COMPANY [US/US]; 1
River Road, Schenectady, NY 12345 (US).(72) Inventors: HLADIK, Stephen, Michael; 13 Olympus Court,
Albany, NY 12208 (US). ANDERSON, John, Bailey; 120
Greenleaf Drive, Latham, NY 12110 (US).(74) Agents: STECKLER, Henry, I. et al.; General Electric Com-
pany, 3135 Easton Turnpike W3C, Fairfield, CT 06431
(US).(81) Designated States: AU, BR, CA, CN, CZ, HU, IL, JP, KR,
MX, NO, PL, RU, UA, European patent (AT, BE, CH, DE,
DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).Published
With international search report.

(54) Title: PARALLEL CONCATENATED TAIL-BITING CONVOLUTIONAL CODE AND DECODER THEREFOR

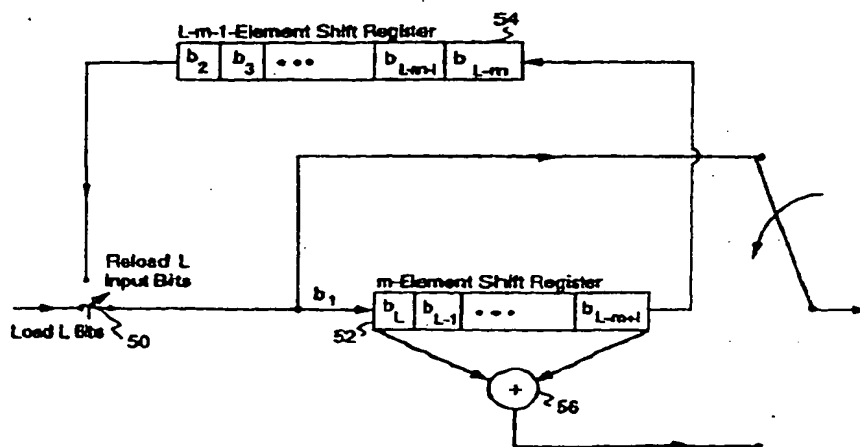

(57) Abstract

A parallel concatenated convolutional coding scheme utilizes tail-biting nonrecursive systematic convolutional codes. The associated decoder iteratively utilizes circular maximum *a posteriori* decoding to produce hard and soft decision outputs. This encoding/decoding system results in improved error-correction performance for short messages.

FOR THE PURPOSES OF INFORMATION ONLY

* Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NI	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PARALLEL CONCATENATED TAIL-BITING
CONVOLUTIONAL CODE AND DECODER THEREFOR

Field of the Invention

The present invention relates generally to error-correction coding
5 for the communication of short messages over poor channels and, more particularly, to a parallel concatenated convolutional coding technique and a decoder therefor.

Background of the Invention

One form of parallel concatenated coding, referred to as either
10 parallel concatenated convolutional coding (PCCC) or "turbo coding", has been the subject of recent coding research due to impressive demonstrated coding gains when applied to blocks of 10,000 or more bits. (See C. Berrou, A. Glavieux and P. Thitimajshima, "Near Shannon Limit Error-Correcting Coding and Decoding: Turbo-Codes," *Proceedings of the IEEE International*
15 *Conference on Communications*, 1993, pp. 1064-1070; J.D. Andersen, "The TURBO Coding Scheme," Report IT-146 ISSN 0105-854, Institute of Telecommunication, Technical University of Denmark, December 1994; and P. Robertson, "Illuminating the Structure of Code and Decoder of Parallel Concatenated Recursive Systematic (Turbo) Codes," 1994 *IEEE Globecom*
20 *Conference*, pp. 1298-1303.)

However, it has been shown that the performance of a turbo code degrades substantially as the length of the encoded data block decreases. This effect is due to the strong dependence of its component recursive systematic convolutional codes' weight structures on block length. A second
25 issue is the proper termination of message blocks applied to a turbo encoder. As described by O. Joerisson and H. Meyr in "Terminating the Trellis of Turbo-Codes," *IEE Electronics Letters*, vol. 30, no. 16, August 4, 1994, pp. 1285-1286, the interleaving used in turbo encoders may make it impossible to terminate both the interleaved and non-interleaved encoder input sequences with
30 a single set of tail bits. While it is possible to use a second tail sequence

- 2 -

embedded into the message structure such that the encoder operating on the interleaved data sequence is properly terminated, this doubles the overhead associated with encoder termination and reduces the effective code rate. An alternative is not to terminate one of the encoder sequences, but this degrades performance of the encoder/decoder system, particularly when applied to short messages. In "Terminating the Trellis of Turbo-Codes in the Same State," *IEE Electronics Letters*, 1995, vol. 31, no. 1, January 5, pp. 22-23, A.S. Barbulescu and S.S. Pietrobon reported a method that places restrictions on the interleaver design in order to terminate two component recursive systematic convolutional (RSC) encoders with a single termination bit sequence. Their performance results show some degradation compared to performance obtained by terminating both encoders when an optimized interleaver is used. In addition, published bit-error rate (BER) versus energy-per-bit-to-noise-power-spectral-density ratio (E_b/N_0) data exhibit a flattening in BER over a range of E_b/N_0 values when RSC's are utilized in the turbo encoder.

Accordingly, it is desirable to provide an improved parallel concatenated coding technique for short data blocks.

Summary of the Invention

In accordance with the present invention, a parallel concatenated convolutional coding scheme utilizes tail-biting nonrecursive systematic convolutional (NSC) codes. The associated decoder iteratively utilizes circular maximum *a posteriori* (MAP) decoding to produce hard and soft decision outputs. Use of tail-biting codes solves the problem of termination of the input data sequences in turbo coding, thereby avoiding associated decoder performance degradation for short messages. While NSC codes are generally weaker than recursive systematic convolutional (RSC) codes having the same memory asymptotically as the data block length increases, the free distance of a NSC code is less sensitive to data block length. Hence, parallel concatenated coding with NSC codes will perform better than with RSC codes having the same memory for messages that are shorter than some threshold data block size.

Brief Description of the Drawings

The features and advantages of the present invention will become apparent from the following detailed description of the invention when read with the accompanying drawings in which:

5 FIG. 1 is a simplified block diagram illustrating a parallel concatenated encoder;

 FIG. 2 is a simplified block diagram illustrating a decoder for parallel concatenated codes;

10 FIG. 3 is a simplified block diagram illustrating a tail-biting, nonrecursive systematic convolutional encoder for use in the coding scheme according to the present invention;

 FIG. 4 is a simplified block diagram illustrating a circular MAP decoder useful as a component decoder in a decoder for a parallel concatenated convolutional coding scheme according to the present invention; and

15 FIG. 5 is a simplified block diagram illustrating an alternative embodiment of a circular MAP decoder useful as a component decoder for a parallel concatenated convolutional coding scheme according to the present invention

Detailed Description of the Invention

20 FIG. 1 is a general block diagram of encoder signal processing for parallel concatenated coding schemes. It comprises a plurality N of component encoders 12 which operate on blocks of data bits from a source. The data blocks are permuted by interleaving algorithms via interleavers 14. As shown, there are N-1 interleavers for N encoders 12. Finally, the component
25 encoder outputs are combined into a single composite codeword by a composite codeword formatter 16. The composite codeword formatter is chosen to suit the characteristics of the channel, and it may be followed by a frame formatter chosen to suit the channel and communication system's

/ *

channel access technique. The frame formatter may also insert other necessary overhead such as control bits and synchronization symbols.

A significant code rate advantage can be obtained in parallel concatenated coding if the component codes are systematic codes. The
5 codewords (output) generated by a systematic encoder include the original data bits provided as inputs to the encoder and additional parity bits. (The redundancy introduced by the parity bits is what yields a code's error correction capability.) Therefore, when systematic encoders are used in the parallel concatenated encoder shown in FIG. 1, the codewords produced by all
10 component encoders 12 contain the input data bits. If formatter 16 forms a data packet or composite codeword comprising only the parity bits generated by each component encoder 12 and the block of information bits to be coded, a substantial improvement in the rate of the composite parallel concatenated code is realized by eliminating repetition of the information bits in the transmitted
15 composite codeword. For example, if component encoder 1 and component encoder 2 of a parallel concatenated convolutional code (PCCC) encoder comprising two component codes are both rate 1/2 codes, the composite parallel concatenated code rate is increased from 1/4 for nonsystematic component codes to 1/3 when systematic component codes are used.

20 Parallel concatenated coding schemes which utilize recursive systematic convolutional (RSC) codes have been the recent topic of much research. These parallel concatenated convolutional codes (PCCC's) are also commonly known in the literature as "turbo" codes. As noted hereinabove, it has been demonstrated that these PCCC's can achieve impressive performance
25 in terms of bit error rate (BER) versus the energy per bit to noise power spectral density ratio (E_b/N_0) for the case of relatively large messages, i.e., ten thousand or more bits. However, it has also been shown that the coding gain obtained with turbo codes degrades significantly with decreasing data block size because the recursive systematic convolutional component codes' strengths are
30 quite sensitive to data block length. On the other hand, the performance of a nonrecursive systematic tail-biting convolutional code is independent of data block length for most practical purposes; the obtainable performance degrades

- 5 -

only if the block of data bits encoded is less than a minimum size that is determined by the NSC's decision depth properties.

FIG. 2 illustrates a general decoder 20 for parallel concatenated codes in block diagram form. Decoder 20 comprises the following: a
 5 composite-codeword-to-component-codeword converter 22 which converts the composite codeword received from a channel to individual received codewords for each component decoder 24; N component decoders 24 corresponding to the N component encoders of FIG. 1; the same type (or same) interleavers 14 that are used in the parallel concatenated encoder (FIG. 1); and first and second
 10 deinterleavers 28 and 29, respectively, that each have a sequence reordering characteristic that is equivalent to a series concatenation of N-1 deinterleavers 30 corresponding to the N-1 interleavers used for encoding. The required ordering of these deinterleavers is shown in FIG. 2 and is the reverse of the ordering of the interleavers. The outputs of component decoders 24 are some type of soft-
 15 decision information on the estimated value of each data bit in the received codeword. For example, the outputs of the component decoders may be a first function of the probabilities that the decoded bits are 0 or 1 conditioned on the received sequence of symbols from the channel. One example of such a first function removes the influence of the conditional probability $P(d_i^j = 0 | Y_i^j)$
 20 from a component decoder's soft-decision output that is inputted to a next sequential component decoder after an appropriate permutation, where $P(d_i^j = 0 | Y_i^j)$ is the probability that the jth information bit at time i is 0 conditioned on the jth (systematic) bit of the received channel output symbol Y_i . Alternatively, the soft-decision information outputted by component decoders
 25 24 may be a function of the likelihood ratio

$$\Lambda(d_i^j) = \frac{P(d_i^j = 1 | Y_i^L)}{P(d_i^j = 0 | Y_i^L)} = \frac{1 - P(d_i^j = 0 | Y_i^L)}{P(d_i^j = 0 | Y_i^L)}$$

or as a function of the log-likelihood ratio $\log[\Lambda(d_i^j)]$.

- 6 -

As shown, the N^{th} component decoder has a second output, i.e., a second function of the conditional probabilities for the decoded bit values or likelihood ratios above. An example of this second function is the product of $P(d_i^j = 0 | Y_i^L)$ and the *a priori* probability that $d_i^j = 0$ received from the previous
5 component decoder.

The decoder for parallel concatenated codes operates iteratively in the following way. The first component decoder (decoder 1) calculates a set of soft-decision values for the sequence of information bits encoded by the first component encoder based on the received codeword and any *a priori*
10 information about the transmitted information bits. In the first iteration, if there is no *a priori* information on the source statistics, it is assumed that the bits are equally likely to be 0 or 1 (i.e., $P(\text{bit} = 0) = P(\text{bit} = 1) = 1/2$). The soft-decision values calculated by decoder 1 are then interleaved using the same type (or same) interleaver that was used in the encoder to permute the block of data
15 bits for the second encoder. These permuted soft-decision values and the corresponding received codeword comprise the inputs to the next component decoder (decoder 2). The permuted soft-decision values received from the preceding component decoder and interleaver are utilized by the next component decoder as *a priori* information about the data bits to be decoded.
20 The component decoders operate sequentially in this manner until the N^{th} decoder has calculated a set of soft-decision outputs for the block of data bits that was encoded by the encoder. The next step is deinterleaving soft-decision values from the N^{th} decoder as described hereinabove. The first decoder then operates on the received codeword again using the new soft-decision values
25 from the N^{th} decoder as its *a priori* information. Decoder operation proceeds in this manner for the desired number of iterations. At the conclusion of the final iteration, the sequence of values which are a second function of the soft-decision outputs calculated by the N^{th} decoder is deinterleaved in order to return the data to the order in which it was received by the PCCC encoder. The
30 number of iterations can be a predetermined number, or it can be determined dynamically by detecting decoder convergence.

- 7 -

The decoder provides soft-decision information which is a function of the probability $P(d_t^j = 0 | Y_t^L)$; that is, the conditional probability that the j^{th} data bit in a k -bit symbol input to the encoder at time t is 0 given that the set of channel outputs $Y_t^L = (y_1, \dots, y_L)$ is received. In addition, the
 5 decoder may provide hard-decision information as a function of its soft-decision output through a decision device which implements a decision rule, such as:

$$\hat{d}_t^j = \begin{cases} 0 & P(d_t^j = 0 | Y_t^L) > \frac{1}{2} \\ 1 & P(d_t^j = 0 | Y_t^L) < \frac{1}{2} \end{cases}$$

That is, if $P(d_t^j = 0 | Y_t^L) > \frac{1}{2}$, then $\hat{d}_t^j = 0$; if $P(d_t^j = 0 | Y_t^L) < \frac{1}{2}$, then $\hat{d}_t^j = 1$; otherwise, randomly assign d_t^j the value 0 or 1.
 10

Typical turbo decoders utilize either maximum *a posteriori* (MAP) decoders, such as described by L.R. Bahl, J. Cocke, F. Jelinek and J. Raviv in "Optimal Decoding of Linear Codes for Minimizing Symbol error Rate," *IEEE Transactions of Information Theory*, March 1974, pp. 284-287, or
 15 soft output Viterbi algorithm (SOVA) decoders, as described by J. Hagenauer and P. Hoeher in "A Viterbi Algorithm with Soft-Decision Outputs and its Applications, 1989 *IEEE Globecom Conference*, pp. 1680-1686. A MAP decoder produces the probability that a decoded bit value is 0 or 1. On the other hand, a SOVA decoder typically calculates the likelihood ratio
 20

$$\frac{P(\text{decoded bit is 1})}{P(\text{decoded bit is 0})}$$

for each decoded bit. It is apparent that this likelihood ratio can be obtained from $P(\text{decoded bit is 0})$ and vice versa using $P(\text{decoded bit is 0}) = 1 - P(\text{decoded bit is 1})$. Some computational advantage has been found when
 25 either MAP or SOVA decoders work with the logarithm of likelihood ratios, that is,

$$\log \left(\frac{P(\text{decoded bit is 1})}{P(\text{decoded bit is 0})} \right)$$

It has been demonstrated that the coding gain (error correction capability) obtained with turbo codes degrades significantly with decreasing data block size. Several authors have attributed this behavior primarily to the properties of RSC codes. It has been shown that the distance property of a RSC code increases with increasing data block length. Conversely, the minimum distance of a RSC code decreases with decreasing data block length. A second problem is the difficulty in terminating all RSC codes comprising a turbo coding scheme due to interleaving. Disadvantageously, the adverse effects resulting from a lack of sequence termination or the imposition of restrictions on interleaver design are significant and become even more so with decreasing data block length.

In accordance with the present invention, the component codes in a parallel concatenated convolutional coding scheme comprise tail-biting nonrecursive systematic convolutional codes. The use of such tail-biting codes solves the problem of termination of the input data sequences in turbo coding, thereby avoiding decoder performance degradation for short messages. Although NSC codes are generally weaker than RSC codes having the same memory, the free distance of a NSC code is less sensitive to data block length. Hence, parallel concatenated coding with NSC codes will perform better than with RSC codes having the same memory for messages that are shorter than a predetermined threshold data block size. The performance cross-over point is a function of desired decoded bit error rate, code rate, and code memory.

FIG. 3 illustrates an example of rate = $1/2$, memory = m tail-biting nonrecursive systematic convolutional encoder for use in the parallel concatenated convolutional coding (PCCC) scheme of the present invention. For purposes of description, an (n, k, m) encoder denotes an encoder wherein the input symbols comprise k bits, the output symbols comprise n bits, and m = encoder memory in k -bit symbols. For purposes of illustration, FIG. 3 is drawn for binary input symbols, i.e., $k = 1$. However, the present invention is applicable to any values of k , n , and m .

Initially, a switch 50 is in the down position, and L input bits are shifted into a shift register 52, k at a time (one input symbol at a time for this

example). After loading the L^{th} bit into the encoder, the switch moves to the up position and encoding begins with the shift of the first bit from a second shift register 54 into the nonrecursive systematic encoder; the state of the encoder at this time is $\{b_L, b_{L-1}, \dots, b_{L-(km-1)}\}$. In this example, the encoder output
5 comprises the current input bit and a parity bit formed in block 56 (shown as modulo 2 addition for this example) as a function of the encoder state and the current input symbol. Encoding ends when the L^{th} bit is encoded.

Another aspect of the present invention, the associated decoder
for the hereinabove described parallel concatenated encoder, comprises a
10 circular MAP decoder as described by the present inventors in commonly assigned, copending U.S. Patent Application No. (RD-24,923), which is incorporated by reference herein. In particular, U.S. Patent Application No. (RD-24,923) describes a circular MAP decoder useful for decoding tail-biting convolutional codes. The circular MAP decoder can deliver both an estimate of
15 the encoded data block and reliability information to a data sink, e.g., a speech synthesis signal processor for use in transmission error concealment or protocol processor for packet data as a measure of block error probability for use in repeat request decisions.

In particular, as described in U.S. Patent Application No. (RD-
20 24,923), a circular MAP decoder for error-correcting trellis codes that employ tail biting produces soft-decision outputs. The circular MAP decoder provides an estimate of the probabilities of the states in the first stage of the trellis, which probabilities replace the *a priori* knowledge of the starting state in a conventional MAP decoder. The circular MAP decoder provides the initial state probability
25 distribution in either of two ways. The first involves a solution to an eigenvalue problem for which the resulting eigenvector is the desired initial state probability distribution; with knowledge of the starting state, the circular MAP decoder performs the rest of the decoding according to the conventional MAP decoding algorithm. The second is based on a recursion for which the iterations
30 converge to a starting state distribution. After sufficient iterations, a state on the circular sequence of states is known with high probability, and the circular MAP decoder performs the rest of the decoding according to the conventional MAP decoding algorithm.

- 10 -

The objective of the conventional MAP decoding algorithm is to find the conditional probabilities:

$$P(\text{state } m \text{ at time } t \mid \text{receive channel outputs } y_1, \dots, y_L).$$

5 The term L in this expression represents the length of the data block in units of the number of encoder symbols. (The encoder for an (n, k) code operates on k -bit input symbols to generate n -bit output symbols.) The term y_t is the channel output (symbol) at time t .

The MAP decoding algorithm actually first finds the probabilities:

$$\lambda_t(m) = P(S_t = m; Y_1^L); \quad (1)$$

10

that is, the joint probability that the encoder state at time t , S_t , is m and the set of channel outputs $Y_1^L = \{y_1, \dots, y_L\}$ is received. These are the desired probabilities multiplied by a constant ($P(Y_1^L)$, the probability of receiving the set of channel outputs $\{y_1, \dots, y_L\}$).

15

Now define the elements of a matrix Γ_t by

$$\Gamma_t(i, j) = P(\text{state } j \text{ at time } t; y_t \mid \text{state } i \text{ at time } t-1.)$$

20

The matrix Γ_t is calculated as a function of the channel transition probability $R(Y_t, X)$, the probability $p_t(m|m')$ that the encoder makes a transition from state m' to m at time t , and the probability $q_t(X|m', m)$ that the encoder's output symbol is X given that the previous encoder state is m' and the present encoder state is m . In particular, each element of Γ_t is calculated by summing over all possible encoder outputs X as follows:

$$\gamma_t(m', m) = \sum_X p_t(m|m') q_t(X|m', m) R(Y_t, X). \quad (2)$$

- 11 -

The MAP decoder calculates L of these matrices, one for each trellis stage. They are formed from the received channel output symbols and the nature of the trellis branches for a given code.

Next define the M joint probability elements of a row vector α_t by

$$\alpha_t(j) = P(\text{state } j \text{ at time } t; y_1, \dots, y_t) \quad (3)$$

and the M conditional probability elements of a column vector β_t by

$$\beta_t(j) = P(y_{t+1}, \dots, y_L | \text{state } j \text{ at time } t) \quad (4)$$

for $j = 0, 1, \dots, (M-1)$ where M is the number of encoder states. (Note that matrices and vectors are denoted herein by using boldface type.)

The steps of the MAP decoding algorithm are as follows:

(i) Calculate $\alpha_1, \dots, \alpha_L$ by the forward recursion:

$$\alpha_t = \alpha_{t-1} \Gamma_t, \quad t=1, \dots, L. \quad (5)$$

(ii) Calculate $\beta_1, \dots, \beta_{L-1}$ by the backward recursion:

$$\beta_t = \Gamma_{t+1} \beta_{t+1}, \quad t=L-1, \dots, 1. \quad (6)$$

(iii) Calculate the elements of λ_t by:

$$\lambda_t(i) = \alpha_t(i) \beta_t(i), \quad \text{all } i, t=1, \dots, L. \quad (7)$$

(iv) Find related quantities as needed. For example, let A_t^j be the set of states $S_t = \{S_t^1, S_t^2, \dots, S_t^{km}\}$ such that the j^{th} element of S_t , S_t^j , is equal to zero. For a conventional non-recursive trellis code, $S_t^j = d_t^j$, the j^{th} data bit at time t . Therefore, the decoder's soft-decision output is

- 12 -

$$P(d_t^j = 0 | Y_t^L) = \frac{1}{P(Y_t^L)} \sum_{S_t \in A_t^j} \lambda_t(m)$$

where $P(Y_t^L) = \sum_m \lambda_t(m)$ and

m is the index that corresponds to a state S_t .

- 5 The decoder's hard-decision or decoded bit output is obtained by applying $P(d_t^j = 0 | Y_t^L)$ to the following decision rule:

$$\begin{aligned} \hat{d}_t^j &= 0 \\ P(d_t^j = 0 | Y_t^L) &> \frac{1}{2}; \\ \hat{d}_t^j &= 1 \end{aligned}$$

That is, if $P(d_t^j = 0 | Y_t^L) > \frac{1}{2}$, then $\hat{d}_t^j = 0$; if $P(d_t^j = 0 | Y_t^L) < \frac{1}{2}$, then $\hat{d}_t^j = 1$; otherwise, randomly assign \hat{d}_t^j the value 0 or 1.

- 10 As another example of a related quantity for step (iv) hereinabove, the matrix of probabilities σ_t comprises elements defined as follows:

$$\sigma_t(i, j) = P(S_{t-1} = i; S_t = j; Y_t^L) = \alpha_{t-1}(i) \gamma_t(i, j) \beta_t(j)$$

These probabilities are useful when it is desired to determine the *a posteriori* probability of the encoder output bits.

- 15 In the standard application of the MAP decoding algorithm, the forward recursion is initialized by the vector $\alpha_0 = (1, 0, \dots, 0)$, and the backward recursion is initialized by $\beta_L = (1, 0, \dots, 0)^T$. These initial conditions are based on assumptions that the encoder's initial state $S_0 = 0$ and its ending state $S_L = 0$.

- 20 One embodiment of the circular MAP decoder determines the initial state probability distribution by solving an eigenvalue problem as follows. Let α_t , β_t , Γ_t and λ_t be as before, but take the initial α_0 and β_L as follows:

SUBSTITUTE SHEET (RULE 26)

- 13 -

Set β_L to the column vector $(111...1)^T$.

Let α_0 be an unknown (vector) variable.

5 Then,

(i) Calculate Γ_t for $t = 1, 2, \dots, L$ according to equation (2).

(ii) Find the largest eigenvalue of the matrix product $\Gamma_1 \Gamma_2 \dots \Gamma_L$. Normalize the corresponding eigenvector so that its components sum to unity. This vector is the solution for α_0 . The eigenvalue is $P\{Y_1^L\}$.

10 (iii) Form the succeeding α_t by the forward recursion set forth in equation (5).

(iv) Starting from β_L , initialized as above, form the β_t by the backward recursion set forth in equation (6).

(v) Form the λ_t as in (7), as well as other desired variables, such as, for example, the soft-decision output $P\{d_t^j = 0 | Y_1^L\}$ or the matrix of probabilities σ_t , described hereinabove.

The inventors have shown that the unknown variable α_0 satisfies the matrix equation

$$\alpha_0 = \frac{\alpha_0 \Gamma_1 \Gamma_2 \dots \Gamma_L}{P\{Y_1^L\}}$$

20 From the fact that this formula expresses a relationship among probabilities, we know that the product of Γ_t matrices on the right has largest eigenvalue equal to $P\{Y_1^L\}$, and that the corresponding eigenvector must be a probability vector.

25 With the initial $\beta_L = (111...1)^T$, equation (6) gives β_{L-1} . Thus, repeated applications of this backward recursion give all the β_t . Once α_0 is known and β_L is set, all computations in the circular MAP decoder of the present invention follow the conventional MAP decoding algorithm.

- 14 -

FIG. 4 is a simplified block diagram illustrating a circular MAP decoder 110 for decoding an error-correcting tail-biting trellis code in accordance with the eigenvector method described hereinabove. Decoder 110 comprises a Γ_i calculator 112 which calculates Γ_i as a function of the channel output y_i . The Γ_i calculator receives as inputs the following from a memory 130: the channel transition probability $R(Y_i, X)$, the probability $p_t(m|m')$ that the encoder makes a transition from state m' to m at time t , and the probability $q_t(X|m', m)$ that the encoder's output symbol is X given that the previous encoder state is m' and the present encoder state is m . The Γ_i calculator calculates each element of Γ_i by summing over all possible encoder outputs X in accordance with equation (2).

The calculated values of Γ_i are provided to a matrix product calculator 114 to form the matrix product $\Gamma_1 \Gamma_2 \dots \Gamma_L$ using an identity matrix 116, e.g., received from memory, a switch 118 and a delay circuit 120. At time $t = 1$, the identity matrix is applied as one input to the matrix product calculator. For each subsequent time from $t = 2$ to $t = L$, the matrix product $\prod_{i=1}^{t-1} \Gamma_i$ gets fed back via the delay circuit to the matrix product calculator. Then, at time $t = L$, the resulting matrix product is provided via a switch 121 to a normalized eigenvector computer 122 which calculates the normalized eigenvector corresponding to the largest eigenvalue of the matrix product input thereto. With α_0 thus initialized, i.e., as this normalized eigenvector, the succeeding α_i vectors are determined recursively according to equation (5) in a matrix product calculator 124 using a delay 126 and switch 128 circuitry, as shown. Appropriate values of Γ_i are retrieved from a memory 130, and the resulting α_i are then stored in memory 130.

The values of β_i are determined in a matrix product calculator 132 using a switch 134 and delay 136 circuitry according to equation (6). Then, the probabilities λ_i are calculated from the values of α_i and β_i in an element-by-element product calculator 140 according to equation (7). The values of λ_i are provided to a decoded bit value probability calculator 150 which determines the probability that the j^{th} decoded bit at time t , d^j_t , equals zero. This probability

- 15 -

is provided to a threshold decision device 152 which implements the following decision rule: If the probability from calculator 150 is greater than $\frac{1}{2}$, then decide that the decoded bit is zero; if the probability is less than $\frac{1}{2}$, then decide that the decoded bit is one; if it equals $\frac{1}{2}$, then the decoded bit is randomly assigned the value 0 or 1. The output of the threshold decision device is the decoder's output bit at time t.

The probability that the decoded bit equals zero $P\{d_t^j = 0 \mid Y_t^j\}$ is also shown in FIG. 4 as being provided to a soft output function block 154 for providing a function of the probability, i.e., $f(P\{d_t^j = 0 \mid Y_t^j\})$, such as, for example, the

$$\text{likelihood ratio} = \frac{1 - P\{d_t^j = 0 \mid Y_t^j\}}{P\{d_t^j = 0 \mid Y_t^j\}}$$

as the decoder's soft-decision output. Another useful function of $P\{d_t^j = 0 \mid Y_t^j\}$ is the

$$\log \text{likelihood ratio} = \log \left\{ \frac{1 - P\{d_t^j = 0 \mid Y_t^j\}}{P\{d_t^j = 0 \mid Y_t^j\}} \right\}$$

Alternatively, a useful function for block 154 may simply be the identity function so that the soft output is just $P\{d_t^j = 0 \mid Y_t^j\}$.

An alternative embodiment of the circular MAP decoder determines the state probability distributions by a recursion method. In particular, in one embodiment (the dynamic convergence method), the recursion continues until decoder convergence is detected. In this recursion (or dynamic convergence) method, steps (ii) and (iii) of the eigenvector method described hereinabove are replaced as follows:

- 16 -

(ii.a) Starting with an initial α_0 equal to $(1/M, \dots, 1/M)$, where M is the number of states in the trellis, calculate the forward recursion L times. Normalize the results so that the elements of each new α_t sum to unity. Retain all L α_t vectors.

- 5 (ii.b) Let α_0 equal α_L from the previous step and, starting at $t = 1$, calculate the first $L_{w_{min}}$ α_t probability vectors again.

That is, calculate $\alpha_t(m) = \sum_{i=0}^{M-1} \alpha_{t-1}(i) \gamma_t(i, m)$ for $m = 0, 1, \dots, M-1$ and $t = 1, 2, \dots, L_{w_{min}}$ where $L_{w_{min}}$ is a suitable minimum number of trellis stages.

- 10 Normalize as before. Retain only the most recent set of L α 's found by the recursion in steps (ii.a) and (ii.b) and the $\alpha_{L_{w_{min}}}$ found previously in step

(ii.a).

- (ii.c) Compare $\alpha_{L_{w_{min}}}$ from step (ii.b) to the previously found set from step (ii.a). If the M corresponding elements of the new and old $\alpha_{L_{w_{min}}}$ are within a tolerance range, proceed to step (iv) set forth hereinabove. Otherwise, continue to step (ii.d).

15

(ii.d) Let $t = t + 1$ and calculate $\alpha_t = \alpha_{t-1} \Gamma_t$. Normalize as before. Retain only the most recent set of L α 's calculated and the α_t found previously in step (ii.a).

(ii.e) Compare the new α_t 's to the previously found set. If the M new and old α_t 's are within a tolerance range, proceed to step (iv). Otherwise, continue with

- 20 step (ii.d) if the two most recent vectors do not agree to within the tolerance range and if the number of recursions does not exceed a specified maximum (typically $2L$); proceeding to step (iv) otherwise.

- 25 This method then continues with steps (iv) and (v) given hereinabove with respect to the eigenvector method to produce the soft-decision outputs and decoded output bits of the circular MAP decoder.

In another alternative embodiment of the circular MAP decoder as described in U.S. Patent Application No. (RD-24,923), the recursion method

- 17 -

described hereinabove is modified so that the decoder only needs to process a predetermined, fixed number of trellis stages for a second time, that is, a predetermined wrap depth. This is advantageous for implementation purposes because the number of computations required for decoding is the same for every encoded message block. Consequently, hardware and software complexities are reduced.

One way to estimate the required wrap depth for MAP decoding of a tail-biting convolutional code is to determine it from hardware or software experimentation, requiring that a circular MAP decoder with a variable wrap depth be implemented and experiments be conducted to measure the decoded bit error rate versus E_b/N_0 for successively increasing wrap depths. The minimum decoder wrap depth that provides the minimum probability of decoded bit error for a specified E_b/N_0 is found when further increases in wrap depth do not decrease the error probability.

If a decoded bit error rate that is greater than the minimum achievable at a specified E_b/N_0 is tolerable, it is possible to reduce the required number of trellis stages processed by the circular MAP decoder. In particular, the wrap depth search described hereinabove may simply be terminated when the desired average probability of bit error is obtained.

Another way to determine the wrap depth for a given code is by using the code's distance properties. To this end, it is necessary to define two distinct decoder decision depths. As used herein, the term "correct path" refers to the sequence of states or a path through the trellis that results from encoding a block of data bits. The term "incorrect subset of a node" refers to the set of all incorrect (trellis) branches out of a correct path node and their descendents. Both the decision depths defined below depend on the convolutional encoder.

The decision depths are defined as follows:

- (i) Define the forward decision depth for e -error correction, $LF(e)$, to be the first depth in the trellis at which all paths in the incorrect subset of a correct path initial node, whether later merging to the correct path or not, lie more than a Hamming distance $2e$ from the correct path. The significance of $LF(e)$ is that

if there are e or fewer errors forward of the initial node, and encoding is known to have begun there, then the decoder must decode correctly. A formal tabulation of forward decision depths for convolutional codes was provided by J.B. Anderson and K. Balachandran in "Decision Depths of Convolutional Codes", *IEEE Transactions on Information Theory*, vol. IT-35, pp. 455-59, March 1989. A number of properties of $LF(e)$ are disclosed in this reference and also by J.B. Anderson and S. Mohan in *Source and Channel Coding - An Algorithmic Approach*, Kluwer Academic Publishers, Norwell, MA, 1991. Chief among these properties is that a simple linear relation exists between LF and e ; for example, with rate $1/2$ codes, LF is approximately $9.08e$.

(ii) Next define the unmerged decision depth for e -error correction, $LU(e)$, to be the first depth in the trellis at which all paths in the trellis that never touch the correct path lie more than a Hamming distance of $2e$ away from the correct path.

The significance of $LU(e)$ for soft-decision circular MAP decoding is that the probability of identifying a state on the actual transmitted path is high after the decoder processes $LU(e)$ trellis stages. Therefore, the minimum wrap depth for circular MAP decoding is $LU(e)$. Calculations of the depth $LU(e)$ show that it is always larger than $LF(e)$ but that it obeys the same approximate law. This implies that the minimum wrap depth can be estimated as the forward decision depth $LF(e)$ if the unmerged decision depth of a code is not known.

By finding the minimum unmerged decision depth for a given encoder, we find the fewest number of trellis stages that must be processed by a practical circular decoder that generates soft-decision outputs. An algorithm to find $LF(e)$, the forward decision depth, was given by J.B. Anderson and K. Balachandran in "Decision Depths of Convolutional Codes", cited hereinabove. To find $LU(e)$:

(i) Extend the code trellis from left to right, starting from all trellis nodes simultaneously, except for the zero-state.

- 19 -

(ii) At each level, delete any paths that merge to the correct (all-zero) path; do not extend any paths out of the correct (zero) state node.

(iii) At level k , find the least Hamming distance, or weight, among paths terminating at nodes at this level.

5 (iv) If this least distance exceeds $2e$, stop. Then, $LU(e) = k$.

As described in U.S. Patent Application No. (RD-24,923), experimentation via computer simulation lead to two unexpected results: (1) wrapped processing of β_i improves decoder performance; and (2) the use of a wrap depth of $LU(e) + LF(e) = 2 LF(e)$ improves performance significantly.
 10 Hence, a preferred embodiment of the circular MAP decoder algorithm based on recursion comprises the following steps:

(i) Calculate Γ_i for $i = 1, 2, \dots, L$ according to equation (2).

(ii) Starting with an initial α_0 equal to $(1/M, \dots, 1/M)$, where M is the number of states in the trellis, calculate the forward recursion of equation (5) $(L + L_w)$ times for $u = 1, 2, \dots, (L + L_w)$ where L_w is the decoder's wrap depth.
 15 The trellis-level index i takes on the values $((u-1) \bmod L) + 1$. When the decoder wraps around the received sequence of symbols from the channel, α_L is treated as α_0 . Normalize the results so that the elements of each new α_i sum to unity. Retain the L most recent α vectors found via this recursion.

(iii) Starting with an initial β_L equal to $(1, \dots, 1)^T$, calculate the backward recursion of equation (6) $(L + L_w)$ times for $u = 1, 2, \dots, (L + L_w)$.
 20 The trellis-level index i takes on the values $L - (u \bmod L)$. When the decoder wraps around the received sequence, β_1 is used as β_{L+1} and Γ_1 is used as Γ_{L+1} when calculating the new β_L . Normalize the results so that the elements of each new β_i sum to unity. Again, retain the L most recent β vectors found
 25 via this recursion.

The next step of this preferred recursion method is the same as step (v) set forth hereinabove with respect to the eigenvector method to produce the soft-decisions and decoded bits output by the circular MAP decoder.

- 20 -

FIG. 5 is a simplified block diagram illustrating a circular MAP decoder 180 in accordance with this preferred embodiment of the present invention. Decoder 180 comprises a Γ_t calculator 182 which calculates Γ_t as a function of the channel output y_t . The channel outputs y_1, \dots, y_L are provided to the Γ_t calculator via a switch 184. With the switch in the down position, L channel output symbols are loaded into a Γ_t calculator 182 and a shift register 186 one at a time. Then, switch 184 is moved to the up position to allow the shift register to shift the first L_w received symbols into the Γ_t calculator again, i.e., to provide circular processing. The Γ_t calculator receives as inputs from memory 130 the channel transition probability $R(Y_t, X)$, the probability $p_t(m|m')$ that the encoder makes a transition from state m' to m at time t , and the probability $q_t(X|m', m)$ that the encoder's output symbol is X given that the previous encoder state is m' and the present encoder state is m . The Γ_t calculator calculates each element of Γ_t by summing over all possible encoder outputs X in accordance with equation (2).

The calculated values of Γ_t are provided to a matrix product calculator 190 which multiplies the Γ_t matrix by the α_{t-1} matrix, which is provided recursively via a delay 192 and demultiplexer 194 circuit. Control signal CNTRL1 causes demultiplexer 194 to select α_0 from memory 196 as one input to matrix product calculator 190 when $t = 1$. When $2 \leq t \leq L$, control signal CNTRL1 causes demultiplexer 194 to select α_{t-1} from delay 192 as one input to matrix product calculator 190. Values of Γ_t and α_t are stored in memory 196 as required.

The β_t vectors are calculated recursively in a matrix product calculator 200 via a delay 202 and demultiplexer 204 circuit. Control signal CNTRL2 causes demultiplexer 204 to select β_L from memory 196 as one input to matrix product calculator 200 when $t = L-1$. When $L-2 \geq t \geq 1$, control signal CNTRL2 causes demultiplexer 204 to select β_{t+1} from delay 102 as one input to matrix product calculator 200. The resulting values of β_t are multiplied by the values of α_t , obtained from memory 196, in an element-by-element product calculator 206 to provide the probabilities λ_t , as described hereinabove. In the same manner as described hereinabove with reference to FIG. 4, the values of λ_t are provided to a decoded bit value probability

- 21 -

calculator 150, the output of which is provided to a threshold decision device 152, resulting in the decoder's decoded output bits.

The conditional probability that the decoded bit equals zero ($P(d_i^j = 0 | Y_i^j)$) is also shown in FIG. 5 as being provided to a soft output
5 function block 154 for providing a function of the probability.

- 22 -

i.e., $f(P\{d_t^j = 0 \mid Y_t^j\})$, such as, for example, the

$$\text{likelihood ratio} = \frac{1 - P\{d_t^j = 0 \mid Y_t^j\}}{P\{d_t^j = 0 \mid Y_t^j\}}$$

as the decoder's soft-decision output. Another useful function of

$P\{d_t^j = 0 \mid Y_t^j\}$ is the

$$5 \quad \log \text{ likelihood ratio} = \log \left\{ \frac{1 - P\{d_t^j = 0 \mid Y_t^j\}}{P\{d_t^j = 0 \mid Y_t^j\}} \right\}.$$

Alternatively, a useful function for block 154 may simply be the identity function so that the soft output is just $P\{d_t^j = 0 \mid Y_t^j\}$.

In accordance with the present invention, it is possible to increase the rate of the parallel concatenated coding scheme comprising tail-
 10 biting nonrecursive systematic codes by deleting selected bits in the composite codeword formed by the composite codeword formatter according to an advantageously chosen pattern prior to transmitting the bits of the composite codeword over a channel. This technique is known as puncturing. This puncturing pattern is also known by the decoder. The following simple
 15 additional step performed by the received composite-codeword-to-component-codeword converter provides the desired decoder operation: the received composite-codeword-to-component-codeword converter merely inserts a neutral value for each known punctured bit during the formation of the received component codewords. For example, the neutral value is for the case of
 20 antipodal signalling over an additive white Gaussian noise channel. The rest of the decoder's operation is as described hereinabove.

It has heretofore been widely accepted that nonrecursive systematic convolutional codes would not be useful as the component codes in

a parallel concatenated coding scheme because of the superior distance properties of RSC codes for relatively large the data block lengths, as reported, for example in S. Benedetto and G. Montorsi, "Design of Parallel Concatenated Convolutional Codes," *IEEE Transactions on Communications*, to be published. However, as described hereinabove, the inventors have determined that the minimum distance of a NSC code is less sensitive to data block length and, therefore, can be used advantageously in communication systems that transmit short blocks of data bits in very noisy channels. In addition, the inventors have determined that the use of tail-biting codes solves the problem of termination of input data sequences in turbo codes. Use of tail-biting convolutional codes as component codes in a parallel concatenated coding scheme has not been proposed heretofore. Hence, the present invention provides a parallel concatenated nonrecursive tail-biting systematic convolutional coding scheme with a decoder comprising circular MAP decoders for decoding the component tail-biting convolutional codes to provide better performance for short data block lengths than in conventional turbo coding schemes, as measured in terms of bit error rate versus signal-to-noise ratio.

While the preferred embodiments of the present invention have been shown and described herein, it will be obvious that such embodiments are provided by way of example only. Numerous variations, changes and substitutions will occur to those of skill in the art without departing from the invention herein. Accordingly, it is intended that the invention be limited only by the spirit and scope of the appended claims.

- 24 -

PARALLEL CONCATENATED TAIL-BITING
CONVOLUTIONAL CODE AND DECODER THEREFOR

WHAT IS CLAIMED IS:

1. A method for parallel concatenated convolutional encoding, comprising the steps of:

providing a block of data bits to a parallel concatenated encoder comprising a plurality of N component encoders and N-1 interleavers
5 connected in a parallel concatenation;

encoding the block of data bits in a first one of the component encoders by applying a tail-biting nonrecursive systematic convolutional code thereto and thereby generating a corresponding first component codeword comprising the data bits and parity bits;

10 interleaving the block of data bits to provide a permuted block of data bits;

encoding the resulting permuted block of data bits in a subsequent component encoder by applying a tail-biting nonrecursive systematic convolutional code thereto, and thereby generating a corresponding
15 second component codeword comprising the data bits and parity bits;

repeating the steps of interleaving and encoding the resulting permuted block of data bits through the remaining N-2 interleavers and the remaining N-2 component encoders, and thereby generating component codewords comprising the data bits and parity bits; and

20 formatting the bits of the component codewords to provide a composite codeword.

2. The method of claim 1 wherein the formatting step is performed such that the composite codeword includes only one occurrence of each bit in the block of data bits.

- 25 -

3. The method of claim 1 wherein the formatting step is performed such that the composite codeword includes only selected ones of the bits comprising the component codewords according to a predetermined pattern.

4. A method for decoding parallel concatenated convolutional codes, comprising the steps of:

receiving from a channel a composite codeword that comprises a formatted collection of bits from a plurality (N) of component codewords that
5 have been generated by applying tail-biting nonrecursive systematic convolutional codes to a block of data bits in a parallel concatenated encoder, forming received component codewords from the received composite codeword, each respective received component codeword being received by a corresponding one of a plurality of N component decoders of a composite
10 decoder, each respective component decoder also receiving a set of *a priori* soft-decision information for values of the data bits;

decoding the received component codewords by a process of iterations through the N component decoders and N-1 interleavers to provide soft-decision outputs from the composite decoder, the N component decoders
15 each providing soft-decision information on each data bit in the data block in the order encoded by the corresponding component encoder, the N-1 interleavers each interleaving the soft-decision information from a preceding component decoder to provide a permuted block of soft information to a subsequent component decoder, the set of *a priori* soft-decision information for the first of
20 the N component decoders being calculated assuming that the data bits' values are equally likely for the first iteration and thereafter comprising a first function of the soft-decision information, which first function of the soft-decision information is fed back from the Nth component decoder via a first deinterleaver comprising N-1 deinterleavers corresponding to the N-1
25 interleavers, the N-1 deinterleavers of the first deinterleaver being applied in reverse order to the N-1 interleavers, the set of *a priori* soft-decision information provided to each other component decoder comprising the first

- 26 -

function of the soft-decision information from the previous sequential component decoder; and

3 0 deinterleaving in a second deinterleaver to provide a second function of the soft-decision output from the N^{th} component decoder as the composite decoder's soft-decision output using $N-1$ deinterleavers corresponding to the $N-1$ interleavers, the $N-1$ deinterleavers of the second deinterleaver being applied in reverse order to the $N-1$ interleavers.

5 5. The method of claim 4 wherein the number of iterations through the component decoders, interleavers and deinterleavers is a predetermined number.

6. The method of claim 4 wherein the iterations through the component decoders, interleavers and deinterleavers continues until decoder convergence is detected if the number of iterations is less than a maximum number; otherwise decoding terminates after the maximum number of
5 iterations, and the composite decoder provides the second function of soft-decision outputs from the N^{th} component decoder as its soft-decision output via the second deinterleaver.

7. The method of claim 4, further comprising the step of implementing a decision rule to provide hard-decision outputs as a function of the composite decoder's soft-decision output.

8. The method of claim 4 wherein the formatted collection of bits has been punctured according to a predetermined pattern, the method for decoding further comprising the step of inserting neutral values for all punctured bits when forming the received component codewords.

9. The method of claim 4 wherein the decoding step is performed by the N component decoders comprising circular MAP decoders, the decoding step comprising solving an eigen vector problem.

10. The method of claim 4 wherein the decoding step is performed by the N component decoders comprising circular MAP decoders, the decoding step comprising a recursion method.

- 27 -

11. A method for encoding and decoding parallel concatenated convolutional codes, comprising the steps of:

5 providing a block of data bits to a parallel concatenated encoder comprising a plurality of N component encoders and N-1 interleavers connected in a parallel concatenation;

encoding the block of data bits in a first one of the component encoders by applying a tail-biting nonrecursive systematic convolutional code thereto and thereby generating a corresponding first component codeword comprising the data bits and parity bits;

10 interleaving the block of data bits to provide a permuted block of data bits;

encoding the resulting permuted block of data bits in a subsequent component encoder by applying a tail-biting nonrecursive systematic convolutional code thereto and thereby generating a corresponding
15 second component codeword comprising the data bits and parity bits;

repeating the steps of interleaving and encoding the resulting permuted block of data bits through the remaining N-2 interleavers and the remaining N-2 component encoders, and thereby generating component codewords comprising the data bits and parity bits;

20 formatting the bits of the component codewords to provide a composite codeword;

inputting the composite codeword to a channel;

receiving a received composite codeword from a channel;

25 forming received component codewords from the received composite codeword

providing each respective received component codeword to a corresponding one of a plurality of N component decoders of a composite

- 28 -

decoder, each respective component decoder also receiving a set of *a priori* probabilities for values of the data bits;

30 decoding the received component codewords by a process of iterations through the N component decoders and N-1 interleavers to provide soft-decision outputs from the composite decoder, the N component decoders each providing soft-decision information on each data bit in the data block in the order encoded by the corresponding component encoder, the N-1 interleavers
35 each interleaving the soft-decision information from a preceding component decoder to provide a permuted block of soft information to a subsequent component decoder, the set of *a priori* soft-decision information for the first of the N component decoders being calculated assuming that the data bits' values are equally likely for the first iteration and thereafter comprising a first function
40 of the soft-decision information, which first function of the soft-decision information is fed back from the Nth decoder via a first deinterleaver comprising N-1 deinterleavers corresponding to the N-1 interleavers, the N-1 deinterleavers of the first deinterleaver being applied in reverse order to the N-1 interleavers, the set of *a priori* soft-decision information provided to each other
45 component decoder comprising the first function of the soft-decision information from the previous sequential component decoder, and

 deinterleaving in a second deinterleaver to provide a second function of the soft-decision output from the Nth component decoder as the composite decoder's soft-decision output using N-1 deinterleavers
50 corresponding to the N-1 interleavers, the N-1 deinterleavers of the second deinterleaver being applied in reverse order to the N-1 interleavers.

12. The method of claim 11 wherein the formatting step is performed such that the composite codeword includes only one occurrence of each bit in the block of data bits.

13. The method of claim 11 wherein the formatting step is performed such that the composite codeword includes only selected ones of the bits comprising the component codewords according to a predetermined pattern.

- 29 -

14. The method of claim 11 wherein the number of iterations through the component decoders, interleavers and deinterleavers is a predetermined number.

15. The method of claim 11 wherein the iterations through the component decoders, N-1 interleavers and deinterleavers continues until decoder convergence is detected if the number of iterations is less than a maximum number; otherwise decoding terminates after the maximum number of iterations, and the composite decoder provides the second function of soft-
5 decision outputs from the Nth component decoder as its soft-decision output via the second deinterleaver.

16. The method of claim 11, further comprising the step of implementing a decision rule to provide hard-decision outputs as a function of the composite decoder's soft-decision output.

17. The method of claim 11 wherein the decoding step is performed by the N component decoders comprising circular MAP decoders, the decoding step comprising solving an eigenvector problem.

18. The method of claim 11 wherein the decoding step is performed by the N component decoders comprising circular MAP decoders, the decoding step comprising a recursion method.

19. The method of claim 11 wherein the formatting step further comprises puncturing selected ones of the bits from the component codewords which comprise the composite codeword according to a predetermined pattern, the method for decoding further comprising the step of inserting neutral values
5 for all punctured bits when forming the received component codewords.

20. A parallel concatenated encoder, comprising:

a plurality (N) of component encoders and a plurality (N-1) of interleavers connected in a parallel concatenation for systematically applying tail-biting nonrecursive systematic convolutional codes to a block of data bits
5 and various permutations of the block of data bits, and thereby generating component codewords comprising the data bits and parity bits ; and

- 30 -

a composite codeword formatter for formatting the collection of bits from the component codewords to provide a composite codeword.

21. The encoder of claim 20 wherein the composite codeword formatter produces the composite codeword such that it includes only one occurrence of each bit in the block of data bits.

22. The encoder of claim 20 wherein the composite codeword produces the composite codeword such that it includes only selected ones of the bits comprising the component codewords according to a predetermined pattern.

23. A composite decoder for decoding parallel concatenated convolutional codes, comprising:

5 a composite-codeword-to-component-codeword converter for receiving a composite codeword from a channel, the composite codeword comprising selected bits of a plurality of N component codewords that have been generated by applying tail-biting nonrecursive convolutional codes to a block of data bits in a parallel concatenated encoder, and forming a plurality of N corresponding received component codewords therefrom;

10 a plurality (N) of component decoders, each respective decoder receiving a corresponding received component codeword from the composite-codeword-to-component-codeword converter, each respective decoder also receiving a set of *a priori* soft-decision information for values of the data bits, the N component decoders each providing soft-decision information on each data bit in the data block in the order encoded by a corresponding component
15 encoder in the parallel concatenated encoder;

a plurality of N-1 interleavers, each respective interleaver interleaving the soft-decision information from a corresponding component decoder to provide a permuted block of soft information to a subsequent component decoder, the received codewords being decoded by a process of
20 iterations through the N component decoders and N-1 interleavers to provide soft-decision output from the composite decoder;

- 31 -

a first deinterleaver comprising N-1 deinterleavers corresponding to the N-1 interleavers, the N-1 deinterleavers of the first deinterleaver being applied in reverse order to the N-1 interleavers, the set of *a priori* soft-decision information for the first of the N component decoders being calculated assuming that the data bits' values are equally likely for the first iteration and thereafter comprising a first function of the soft-decision information, which first function of the soft-decision information is outputted by the Nth decoder and fed back via the first deinterleaver, the set of *a priori* soft-decision information provided to each other component decoder comprising the first function of the soft-decision information from the previous sequential component decoder; and

a second deinterleaver comprising N-1 deinterleavers corresponding to the N-1 interleavers, the N-1 deinterleavers of the second deinterleaver being applied in reverse order to the N-1 interleavers, the second deinterleaver deinterleaving a second function of the soft-decision output from the Nth component decoder to provide the composite decoder's soft-decision output.

24. The decoder of claim 23 wherein the number of iterations through the component decoders, interleavers and deinterleavers is a predetermined number.

25. The decoder of claim 23 wherein the iterations through the component decoders, interleavers and deinterleavers continues until decoder convergence is detected if the number of iterations is less than a maximum number; otherwise decoding terminates after the maximum number of iterations, and the composite decoder provides the second function of soft-decision outputs from the Nth component decoder as its soft-decision output via the second deinterleaver.

26. The decoder of claim 23, further comprising a decision device for implementing a decision rule to provide hard-decision outputs as a function of the composite decoder's soft-decision output.

- 32 -

27. The method of claim 23 wherein the N component decoders comprise circular MAP decoders which decode by solving an eigen vector problem.

28. The method of claim 23 wherein the N component decoders comprise circular MAP decoders which decode by using a recursion method.

29. An encoder and decoder system for encoding and decoding parallel concatenated convolutional codes, comprising:

5 a parallel concatenated encoder comprising a plurality (N) of component encoders and a plurality (N-1) of encoder interleavers connected in a parallel concatenation for systematically applying tail-biting nonrecursive systematic convolutional codes to a block of data bits and various permutations of the block of data bits, and thereby generating component codewords comprising the data bits and parity bits; and

10 a composite codeword formatter for formatting the collection of bits from the component codewords to provide a composite codeword;

a composite-codeword-to-component-codeword converter for receiving the composite codeword from a channel and forming a plurality of N corresponding received component codewords therefrom;

15 a plurality (N) of component decoders, each respective decoder receiving a corresponding received component codeword from the composite-codeword-to-component-codeword converter, each respective decoder also receiving a set of *a priori* soft-decision information for values of the data bits, the N component decoders each providing soft-decision information on each data bit in the data block in the order encoded by a corresponding component
20 encoder in the parallel concatenated encoder;

a plurality of N-1 interleavers, each respective interleaver interleaving the soft-decision information from a corresponding component decoder to provide a permuted block of soft information to a subsequent component decoder, the received codewords being decoded by a process of

- 33 -

25 iterations through the N component decoders and N-1 interleavers to provide soft-decision output from the composite decoder;

a first deinterleaver comprising N-1 deinterleavers corresponding to the N-1 interleavers, the N-1 deinterleavers of the first deinterleaver being applied in reverse order to the N-1 interleavers, the set of *a priori* soft-decision information for the first of the N component decoders
30 being calculated assuming that the data bits' values are equally likely for the first iteration and thereafter comprising a first function of the soft-decision information, which first function of the soft-decision information is outputted by the Nth decoder and fed back via the first deinterleaver, the set of *a priori*
35 soft-decision information provided to each other component decoder comprising the first function of the soft-decision information from the previous sequential component decoder; and

a second deinterleaver comprising N-1 deinterleavers corresponding to the N-1 interleavers, the N-1 deinterleavers of the second deinterleaver being applied in reverse order to the N-1 interleavers, the second
40 deinterleaver deinterleaving a second function of the soft-decision output from the Nth component decoder to provide the composite decoder's soft-decision output.

30. The encoder and decoder system of claim 29 wherein the composite codeword formatter produces the composite codeword such that it includes only one occurrence of each bit in the block of data bits.

31. The encoder and decoder system of claim 29 wherein the composite codeword produces the composite codeword such that it includes only selected ones of the bits comprising the component codewords according to a predetermined pattern.

32. The encoder and decoder system of claim 29 wherein the number of iterations through the component decoders, interleavers and deinterleavers is a predetermined number.

33. The encoder and decoder system of claim 29 wherein the iterations through the component decoders, interleavers and deinterleavers


- 34 -

continues until decoder convergence is detected if the number of iterations is less than a maximum number; otherwise decoding terminates after the
5 maximum number of iterations, and the composite decoder provides the second function of soft-decision outputs from the N^{th} component decoder as its soft-decision output via the second deinterleaver.

34. The encoder and decoder system of claim 29, further comprising a decision device for implementing a decision rule to provide hard-decision outputs as a function of the decoder's soft-decision output.

35. The method of claim 29 wherein the N component decoders comprise circular MAP decoders which decode by solving an eigenvector problem.

36. The method of claim 29 wherein the N component decoders comprise circular MAP decoders which decode by using a recursion method.

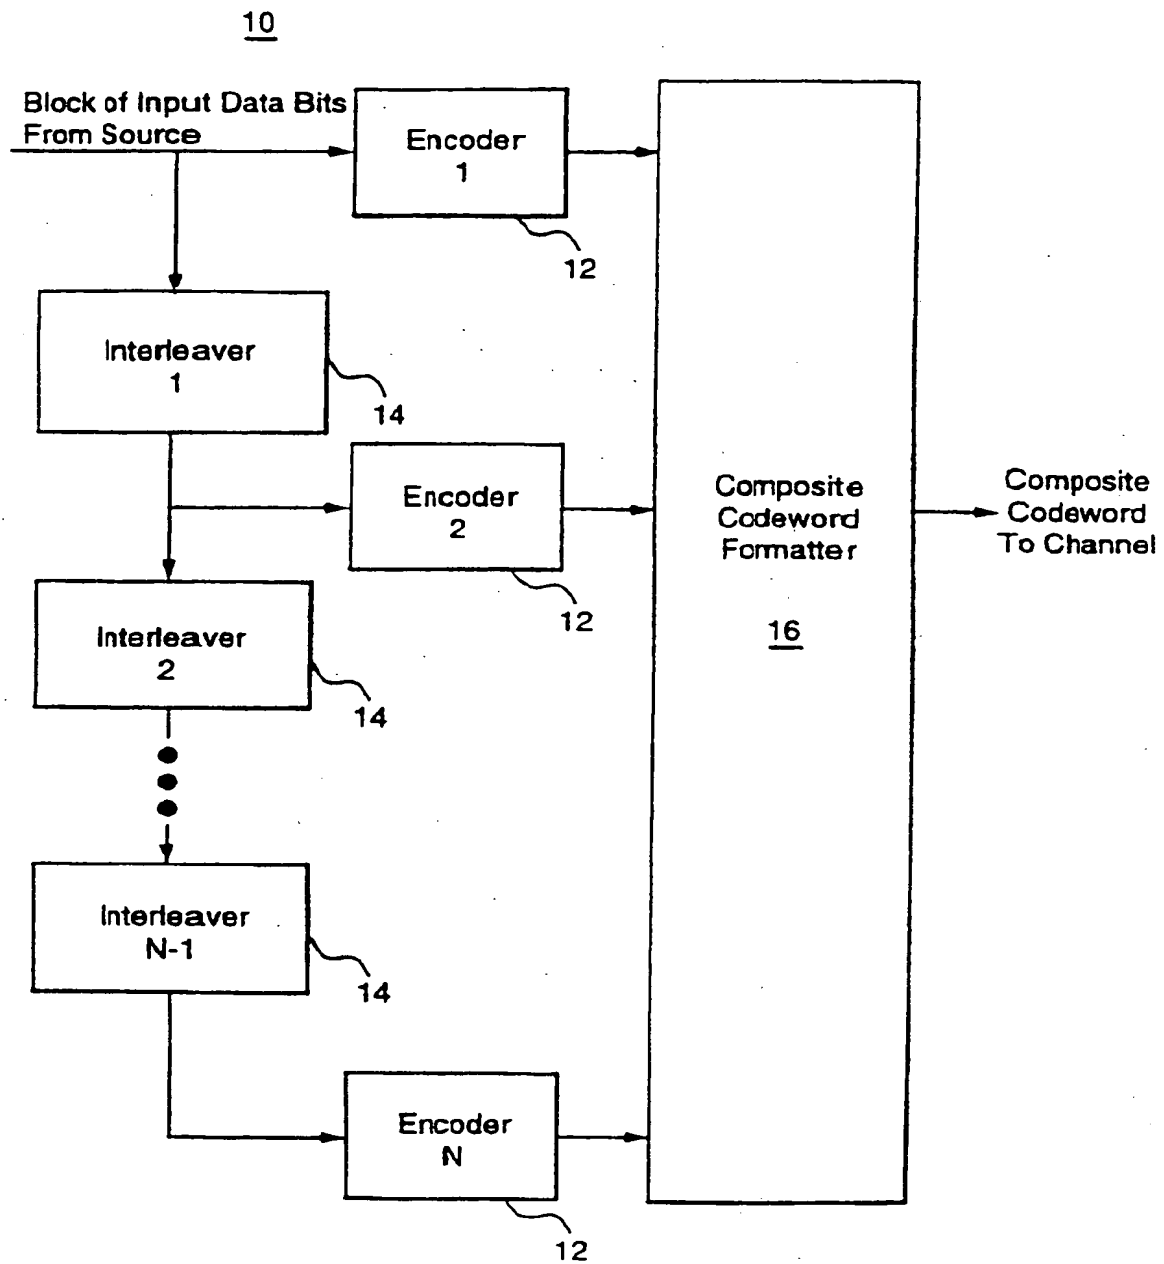**FIG. 1**

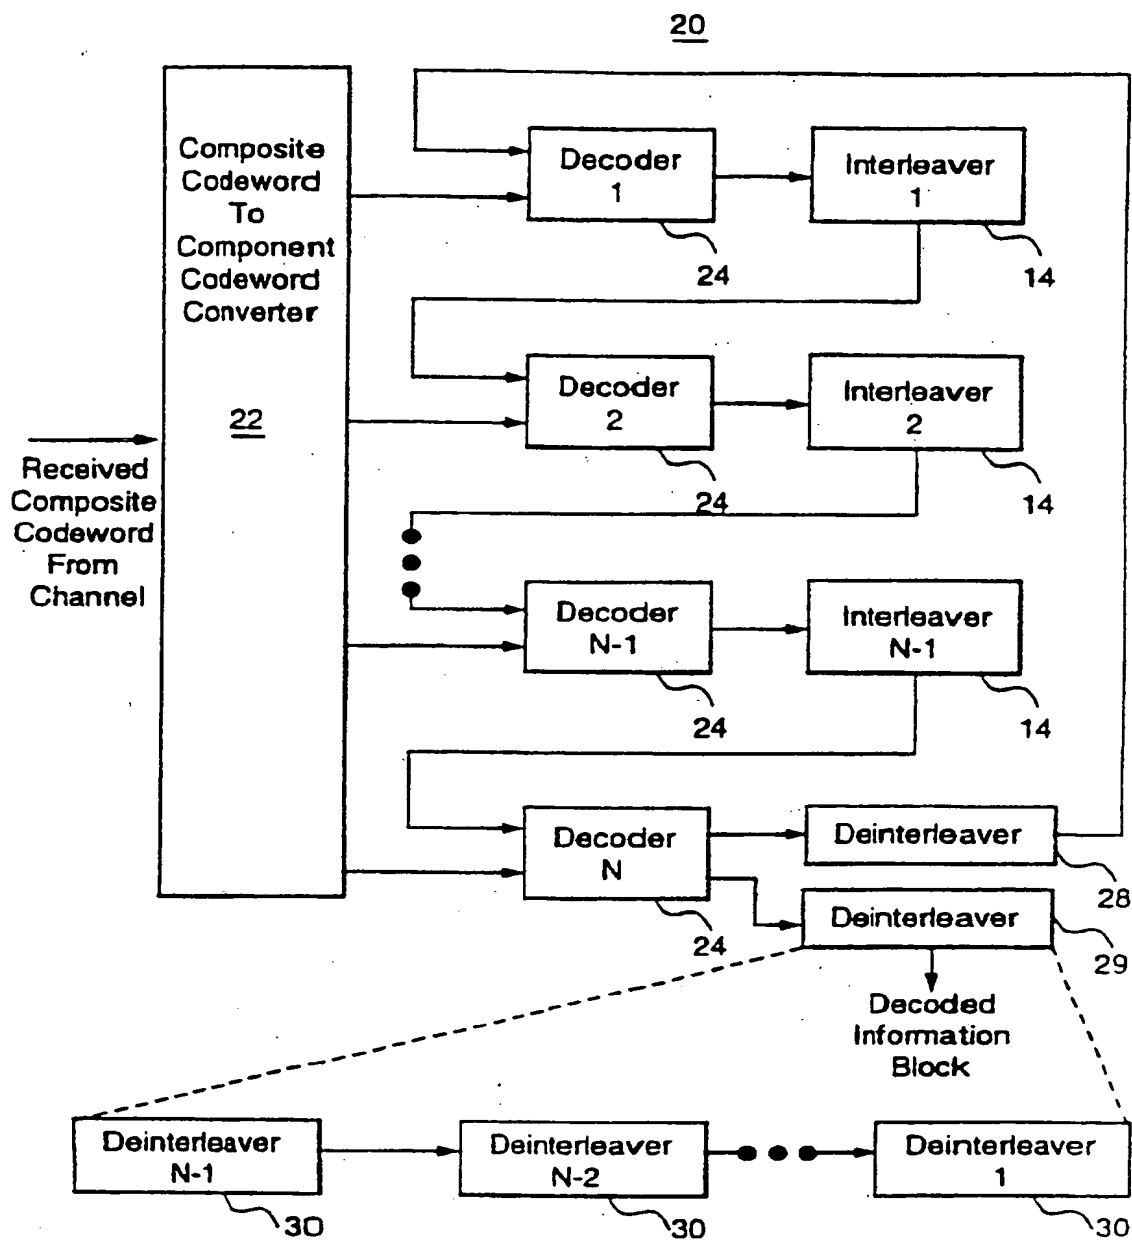


FIG. 2

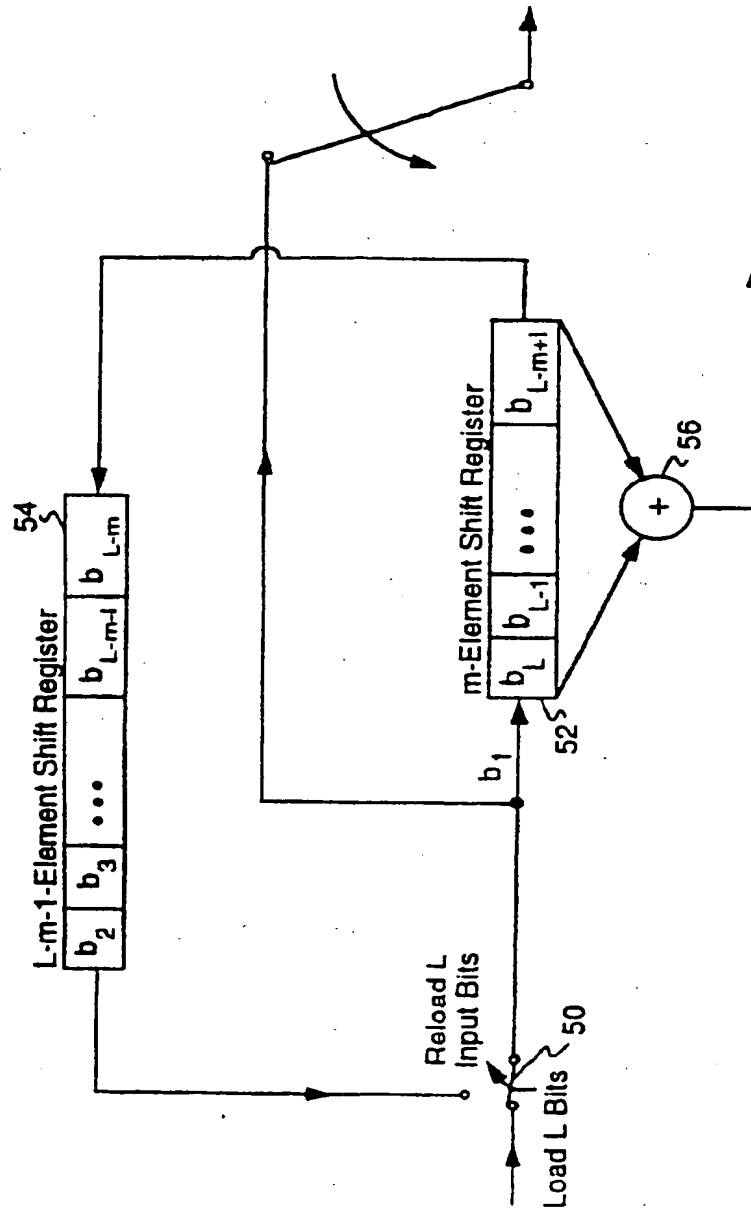


FIG. 3

4/5

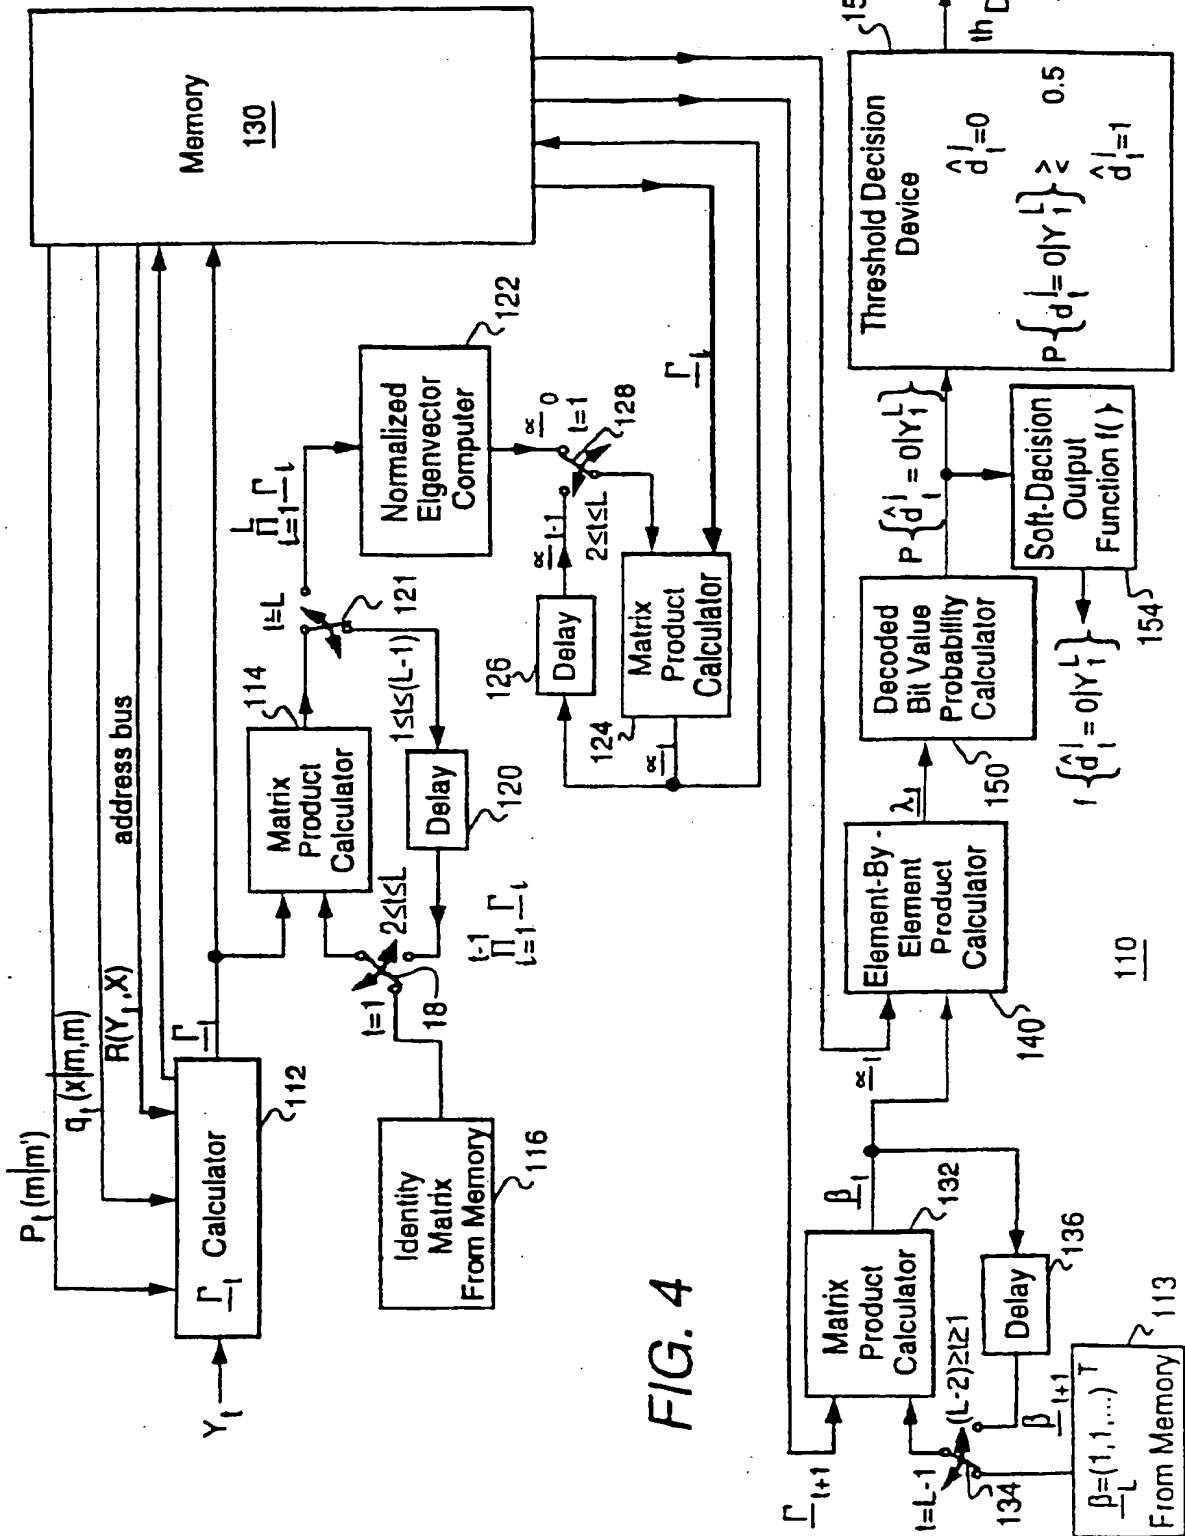


FIG. 4

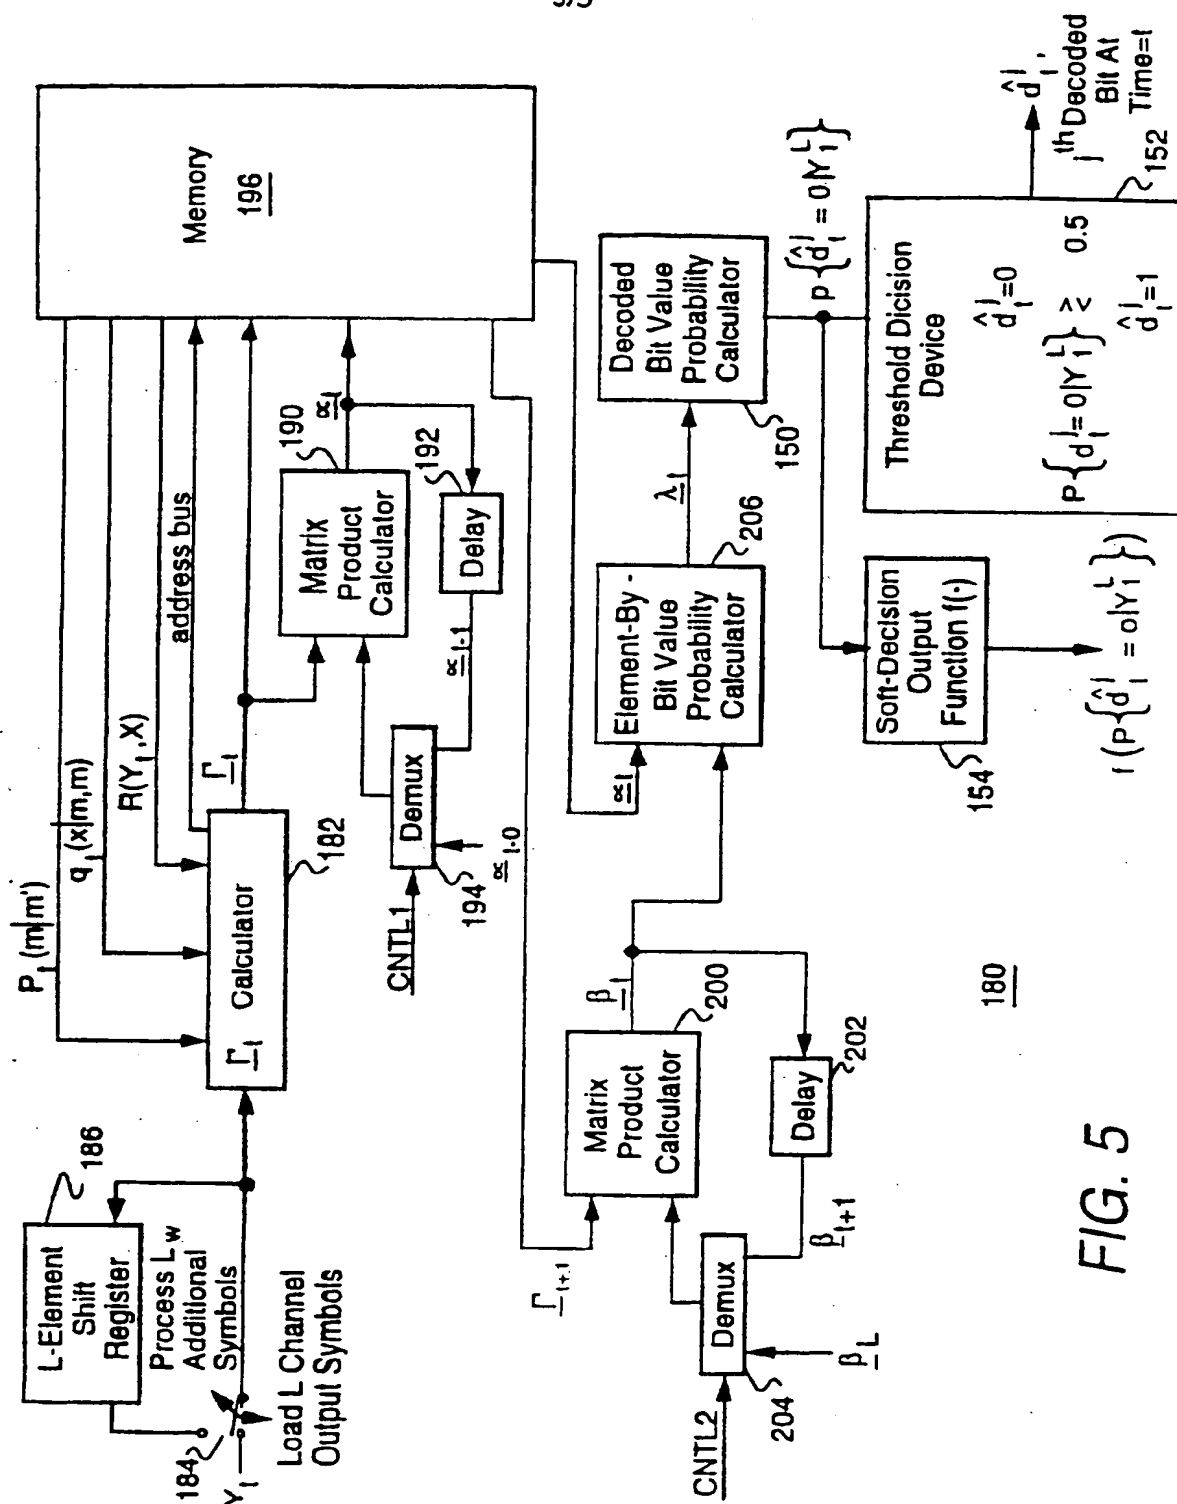


FIG. 5

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/US 97/06129

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H03M13/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H03M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ICC '95 SEATTLE. COMMUNICATIONS - GATEWAY TO GLOBALIZATION. 1995 IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS (CAT. NO.95CH35749), PROCEEDINGS IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS ICC '95, SEATTLE, WA, USA, 18-22 JUNE 1995, ISBN 0-7803-2486-2, 1995, NEW YORK, NY, USA, IEEE, USA, pages 54-59 vol.1, XP000532968 DIVSALAR D ET AL: "Turbo codes for PCS applications" see the whole document --- -/--	1,4,11, 20,23,29

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

31 July 1997

Date of mailing of the international search report

08.08.97

Name and mailing address of the ISA

European Patent Office, P.O. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+ 31-70) 340-3016

Authorized officer

Devergranne, C

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/US 97/06129

C(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ELECTRONICS LETTERS, 25 MAY 1995, UK, vol. 31, no. 11, ISSN 0013-5194, pages 858-859, XP000519086 BENEDETTO S ET AL: "Role of recursive convolutional codes in turbo codes" see the whole document ---	1
A	ICC '95 SEATTLE. COMMUNICATIONS - GATEWAY TO GLOBALIZATION. 1995 IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS (CAT. NO.95CH35749), PROCEEDINGS IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS ICC '95, SEATTLE, WA, USA, 18-22 JUNE 1995, ISBN 0-7803-2486-2, 1995, NEW YORK, NY, USA, IEEE, USA, pages 663-667 vol.2, XP000533097 BENEDETTO S ET AL: "Performance evaluation of parallel concatenated codes" ---	
A	EP 0 611 098 A (AT & T CORP) 17 August 1994 ---	
A	SIGNAL PROCESSING THEORIES AND APPLICATIONS, BARCELONA, SEPT. 18 - 21, 1990, vol. 3, 18 September 1990, TORRES L; MASGRAU E; LAGUNAS M A, pages 1939-1942, XP000365939 BIGLIERI E: "PARALLEL DECODING OF GENERALIZED CONCATENATED CODES" ---	
A	IEEE TRANSACTIONS ON COMMUNICATIONS, MAY 1996, IEEE, USA, vol. 44, no. 5, ISSN 0090-6778, pages 591-600, XP000587085 BENEDETTO S ET AL: "Design of parallel concatenated convolutional codes" cited in the application ---	
A	PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON COMMUNICATIONS (ICC), GENEVA, MAY 23 - 26, 1993, vol. 1 - 2 - 03, 23 May 1993, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 1064-1070, XP000371240 BERROU C ET AL: "NEAR SHANNON LIMIT ERROR - CORRECTING CODING AND DECODING: TURBO-CODES (1)" cited in the application ---	

-/--

INTERNATIONAL SEARCH REPORT

Interns Application No
PCT/US 97/06129

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	IEEE TRANSACTIONS ON INFORMATION THEORY, vol. 35, no. 2, March 1989, pages 455-459, XP000048372 ANDERSON J B ET AL: "DECISION DEPTHS OF CONVOLUTIONAL CODES" cited in the application ---	
A	IEEE TRANSACTIONS ON INFORMATION THEORY, vol. 17-20, no. 2, March 1974, pages 284-287, XP000647243 BAHL L R ET AL: "OPTIMAL DECODING OF LINEAR CODES FOR MINIMIZING SYMBOL ERROR RATE" cited in the application ---	
A	PROCEEDINGS OF THE GLOBAL TELECOMMUNICATIONS CONFERENCE (GLOBECOM), SAN FRANCISCO, NOV. 28 - DEC. 2, 1994, vol. 3 OF 3, 28 November 1994, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 1298-1303, XP000488744 ROBERTSON P: "ILLUMINATING THE STRUCTURE OF CODE AND DECODER OF PARALLEL" cited in the application ---	
A	ELECTRONICS LETTERS, 4 AUG. 1994, UK, vol. 30, no. 16, ISSN 0013-5194, pages 1285-1286, XP000468789 JOERSSSEN O ET AL: "Terminating the trellis of turbo-codes" cited in the application -----	

Information on parent family members

PCT/US 97/06129

EP 0611098 A

17-08-94

Patent family member(s)

Publication date

EP 0611098 A

17-08-94

US	5355376	A
CA	2111544	A
JP	7030439	A

11-10-94
12-08-94
31-01-95